


CHMB6C

Steering Wheel Control Interface Mitsubishi, Citroen & Peugeot

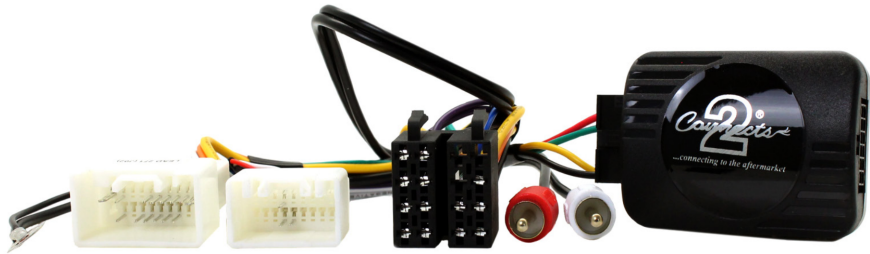

Vehicle Application

Mitsubishi Lancer (CYO) 2007 - 2010
 Mitsubishi Outlander (CWB/CWOW) 2007 - 2010
 Citroen C Crosser 2007 - 2013
 Peugeot 4007 2007>

Key Features

- Retains Steering Wheel Controls (if equipped)
- Retains OEM Aux (if feature is available)

Designed and
 Engineered
 in the UK. 

ABOUT THIS PRODUCT

CHMB6C

Analogue Steering Wheel Control Interface for non-amplified Mitsubishi, Citroen & Peugeot vehicles

WIRING COLOUR CODES

Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -		
Grey	Right Front Speaker +		
Grey/Black	Right Front Speaker -		
White	Left Front Speaker +		
White/Black	Left Front Speaker -		

PRIOR TO INSTALLATION

*Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. **Aerpro can not be held responsible for the installation of this product.***

TECHNICAL SUPPORT

If you need assistance setting up or using your Aerpro product now or in the future, call Aerpro Support Australia
TEL: 03 – 8587 8898 FAX: 03 – 8587 8866 Mon-Fri 9am – 5pm AEST. If you would like to download a digital copy of this manual, or other Aerpro manuals/software, please visit the <http://aerpro.com> website.

FITTING GUIDE

1. Remove and disconnect the original head unit.
2. Connect the 12 way molex connector of the head unit patch lead (supplied separately) to the interface.



3. Connect the opposite end of head unit patch lead to the head unit steering wheel control input on the back of the aftermarket head unit.

NB: This may be a 3.5mm jack plug or a wire input depending upon the head unit brand being fitted. Please see the head unit installation manual for further information on where to connect.


Important: This step must be completed before connecting power to the interface. Failure to do so may result in no steering wheel control function.



4. Connect the 14 way molex connector to the interface



5. Connect the male power/speaker ISO harness to the female power/speaker ISO harness from the aftermarket head unit. For aftermarket head units without an ISO connector, please refer to "Wiring Colour Codes" on Pg. 2.

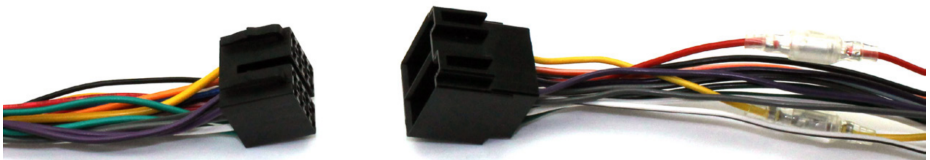

FITTING GUIDE

6. Connect the red and white RCA cable to the aftermarket head unit to retain the vehicle's OEM aux port (if vehicle is equipped)

7. Connect the female vehicle specific connector on the harness to the male vehicle connector from the vehicle. Test head unit for correct operation.

STEERING WHEEL CONTROL FUNCTIONALITY

Original Button	Function
Volume +	Volume +
Volume -	Volume -
Track +	Track +
Track -	Track -
Mode	Source
Pick Up	Pick Up
Hang Up	Hang Up